



## Data Specs

## MQ2 Gas Sensor Module

This Analog Smoke/LPG/CO Gas Sensor module utilizes MQ-2 as the gas detecting component and has a protection resistor and an adjustable resistor on board. MQ2 Gas Sensor module is useful for gas leakage detecting in home and industry. It can detect LPG, i-butane, methane, alcohol, Hydrogen and smoke. Based on its fast response time, measurements can be taken as soon as possible. Also the sensitivity can be adjusted by the potentiometer.




**SKU: [SSR1013](#)**

### **Brief Data:**

- Power Supply: 5VDC.
- Working Current: ~150mA.
- Detecting: LPG, i-butane, propane, methane, alcohol, Hydrogen, smoke.
- Warm-up time: ~20-seconds for stable output.
- TTL Digital Output: 0V (Low) & 5V (High).
- Analog Output A0: 0.1 ~ 0.3 V.
- Connector: 4-pins header with 2.54mm pitch.
- Dimension: (32 x 20 x 22) mm.
- Weight 8.5g.

## Module Layout and Pin Assignment:

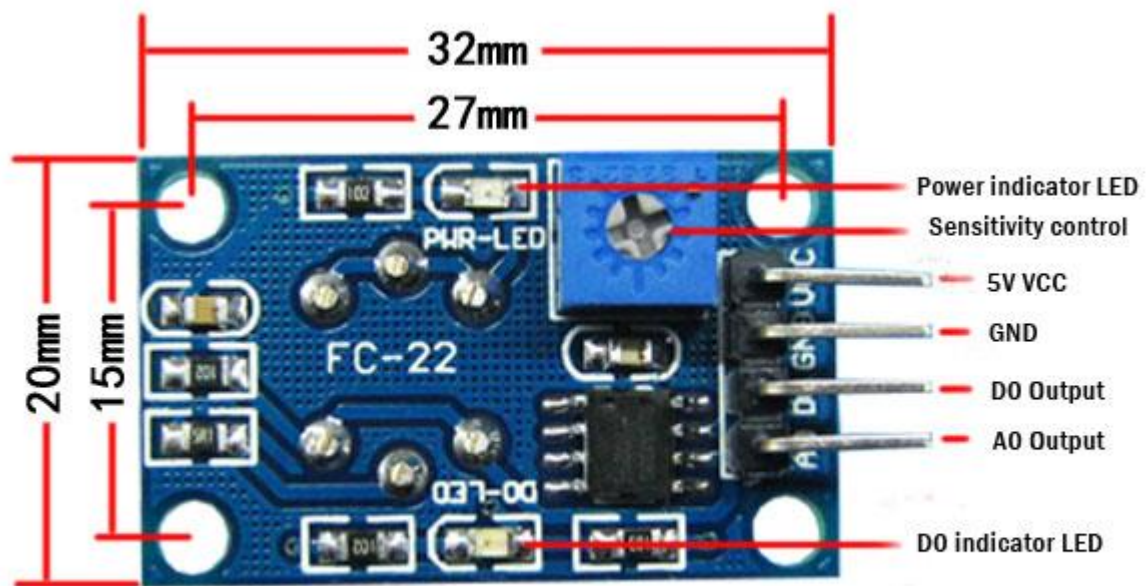


## How does it Work?

The voltage that the sensor output changes according to the smoke/gas level that exists in the atmosphere. The sensor outputs a voltage that is proportional to the concentration of smoke/gas.

In other words, the relationship between voltage and gas concentration is the following:

- The greater the gas concentration, the greater the output voltage
- The lower the gas concentration, the lower the output voltage

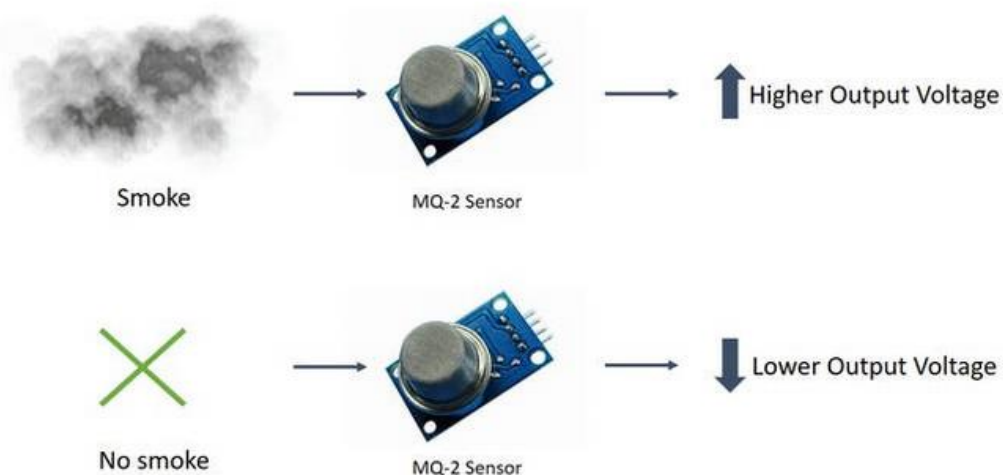

The output can be an analog signal (A0) that can be read with an analog input of the Arduino or a digital output (D0) that can be read with a digital input of the Arduino.


## **MQ2 Application Example with Arduino:**

In this example, you will read the sensor analog output voltage and when the smoke reaches a certain level, it will make sound a buzzer and a red LED will turn on. When the output voltage is below that level, a green LED will be on.

Parts needed:

- 1 x [MQ-2 gas sensor](#)
- 1x [Arduino Uno R3](#)
- 1x [Breadboard](#)
- 1 x [Red LED](#)
- 1 x green LED
- 1 x [buzzer](#)
- 3 x 220Ω resistor
- [Jumper wires](#)

Schematic: Follow these schematics to complete the project:

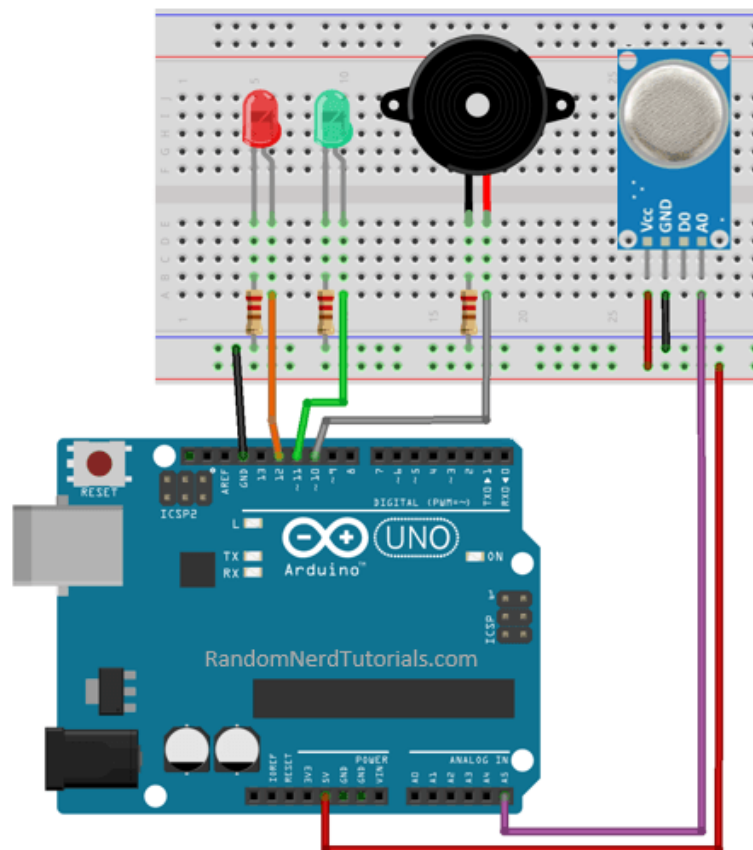

### Code Listing:

Upload the following sketch to your Arduino board (feel free to adjust the variable “*Sensitivity Control*” with a different threshold value):

```

/*=====
// Author      : Handson Technology
// Project     : Arduino Uno
// Description  : MQ2 Gas/Smoke Sensor
// Source-Code : MQ2.ino
//=====
*/

int redLed = 12;
int greenLed = 11;
int buzzer = 10;
int smokeA0 = A5;
// Your threshold value
int sensorThres = 400;

void setup() {
  pinMode(redLed, OUTPUT);
  pinMode(greenLed, OUTPUT);
  pinMode(buzzer, OUTPUT);
  pinMode(smokeA0, INPUT);
  Serial.begin(9600);
}

void loop() {
  int analogSensor = analogRead(smokeA0);

  Serial.print("Pin A0: ");
  Serial.println(analogSensor);
  // Checks if it has reached the threshold value
  if (analogSensor > sensorThres)
  {
    digitalWrite(redLed, HIGH);
    digitalWrite(greenLed, LOW);
    tone(buzzer, 1000, 200);
  }
  else
  {
    digitalWrite(redLed, LOW);
    digitalWrite(greenLed, HIGH);
    noTone(buzzer);
  }
  delay(100);
}

```

You can also read the sensor value by open the Serial Monitor from the Arduino IDE.

***Note: Please allow 2~5 minutes for the MQ2 to stabilize after power up before taken any real value.***



# Handsontec.com

**We have the parts for your ideas**

---

HandsOn Technology provides a multimedia and interactive platform for everyone interested in electronics. From beginner to diehard, from student to lecturer. Information, education, inspiration and entertainment. Analog and digital, practical and theoretical; software and hardware.




open source  
hardware

HandsOn Technology support Open Source Hardware (OSHW) Development Platform.

*Learn : Design : Share*

*handsontec.com*



**The Face behind our product quality...**

**In a world of constant change and continuous technological development, a new or replacement product is never far away – and they all need to be tested.**

**Many vendors simply import and sell without checks and this cannot be the ultimate interests of anyone, particularly the customer. Every part sell on Handsotec is fully tested. So when buying from Handsotec products range, you can be confident you're getting outstanding quality and value.**

**We keep adding the new parts so that you can get rolling on your next project.**



[www.handsontec.com](http://www.handsontec.com)

[Breakout Boards & Modules](#)



[Connectors](#)



[www.handsontec.com](http://www.handsontec.com)

[Electro-Mechanical Parts](#)



[Engineering Material](#)



[www.handsontec.com](http://www.handsontec.com)

[Mechanical Hardware](#)



[Electronics Components](#)

P



[www.handsontec.com](http://www.handsontec.com)

[Power Supply](#)



[Arduino Board & Shield](#)

[Tools & Accessory](#)



[www.handsontec.com](http://www.handsontec.com)

[Tools & Accessory](#)