




40A Reversible Motor Speed Controller

This PWM (Pulse-Width-Modulation) DC Motor Speed Controller allows controlling the speed and direction of a DC motor. This motor speed controller use efficient high power MOSFET with a heat sink and can easily provide a continuous operating current of 40A to DC brush motor, LED dimming control or other DC load.

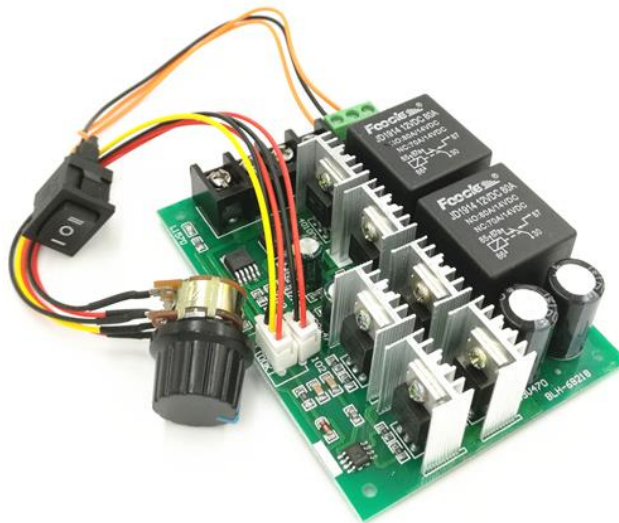


SKU: MDU-1057

Specifications:


- Input Voltage: 10V~50V.
- Maximum current: 60A.
- Constant Operating Current: 40A.
- Speed range: 0% ~ 100%.
- PWM Frequency: 15KHz.
- Quiescent current: 0.01A (standby).
- Control mode: Potentiometer (switch).
- Direction Control: Rocker Switch, Forward-Stop-Backward.
- Speed regulating type: current regulation.
- Reverse: Yes, with switch
- Board size: 100MM*75MM*28MM
- Net weight: 180 g

Mechanical Dimension:

Unit: mm

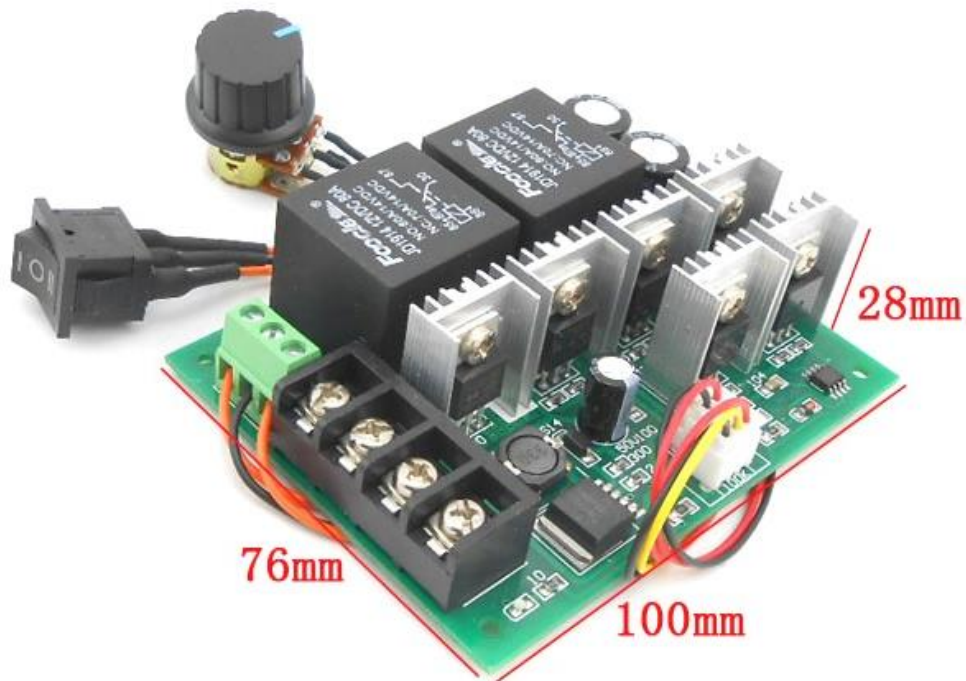

Terminal Connector Function:

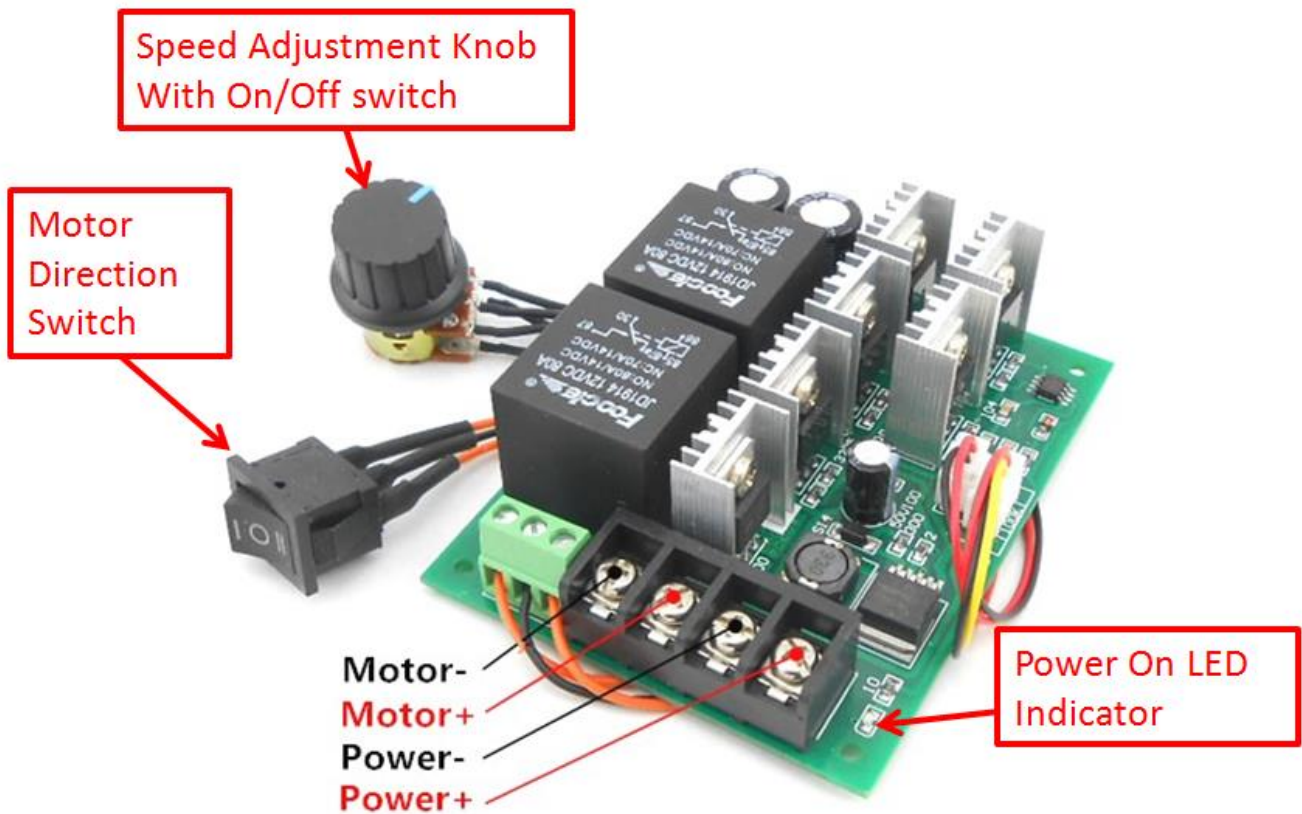

Speed Adjustment Knob with On/Off Switch:


- Turn clockwise to switch On, LED indicator will light on.
- Turn fully counter clockwise to switch off, LED indicator Off.
- Turn clock wise to increase the speed, counter clock wise to decrease the speed.

Motor Direction Switch:



Position	Function
I	Motor in Forward Direction
0	Motor Stop, with braking
II	Motor in Reverse Direction

Application Example:

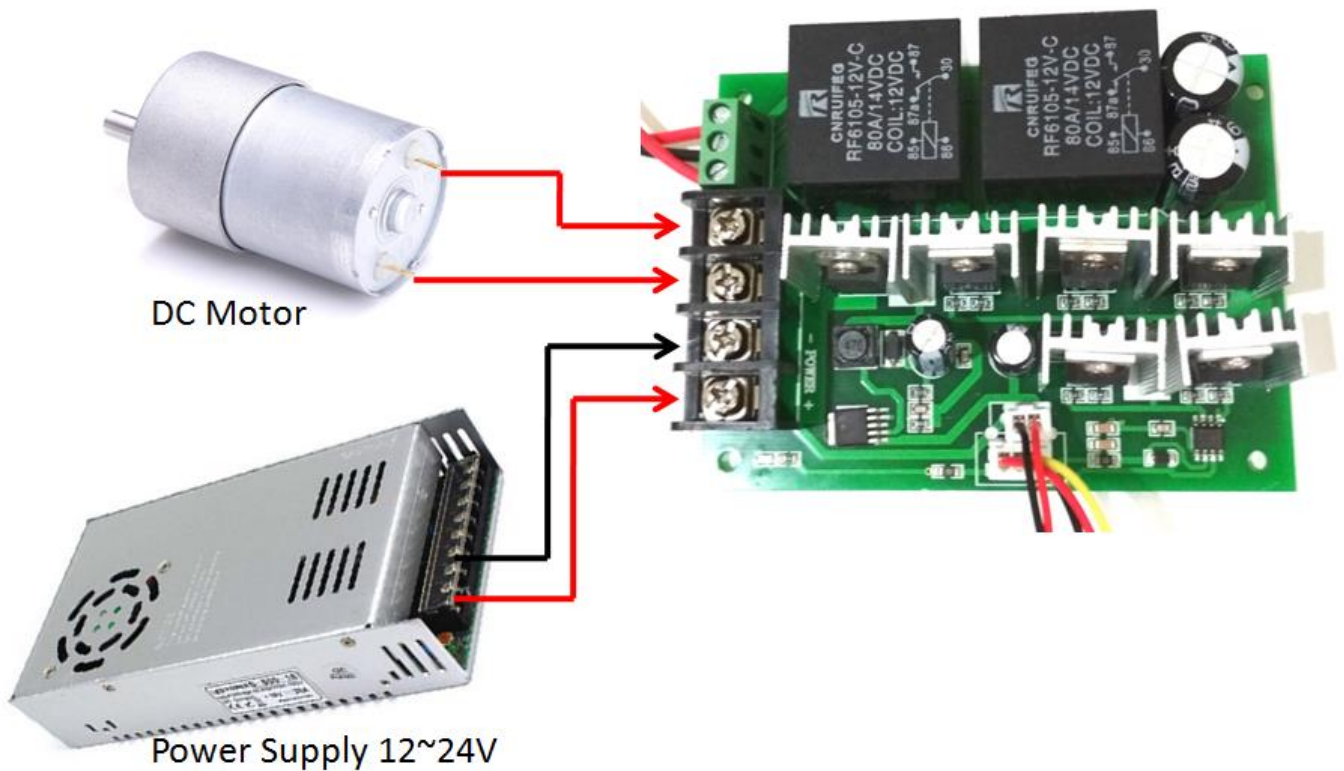

Web Resources:

- [SMPS Power Supply Module](#)
- [775 Ball Bearing DC Motor](#)
- [A58SW-555 Worm Gear Motor](#)
- [JGB37-3530 Metal Gear Motor](#)
- [Motor Bracket](#)



Handsontec.com

We have the parts for your ideas

HandsOn Technology provides a multimedia and interactive platform for everyone interested in electronics. From beginner to diehard, from student to lecturer. Information, education, inspiration and entertainment. Analog and digital, practical and theoretical; software and hardware.



open source
hardware

HandsOn Technology support Open Source Hardware (OSHW) Development Platform.

Learn : Design : Share

handsontec.com



The Face behind our product quality...

In a world of constant change and continuous technological development, a new or replacement product is never far away – and they all need to be tested.

Many vendors simply import and sell without checks and this cannot be the ultimate interests of anyone, particularly the customer. Every part sell on Handsotec is fully tested. So when buying from Handsotec products range, you can be confident you're getting outstanding quality and value.

We keep adding the new parts so that you can get rolling on your next project.



www.handsontec.com

[Breakout Boards & Modules](#)



[Connectors](#)



www.handsontec.com

[Electro-Mechanical Parts](#)



[Engineering Material](#)



www.handsontec.com

[Mechanical Hardware](#)



[Electronics Components](#)

P



www.handsontec.com

[Power Supply](#)



[Arduino Board & Shield](#)

[Tools & Accessory](#)



www.handsontec.com

[Tools & Accessory](#)